

PARTS INCLUDED

| Ref. | Part Number | Description | Qty |
|------|--------------|---------------------------------------------------------------|-----|
| 1) | 00-300-01152 | Supersport Fender Bracket | 1 |
| 2) | 01-4006-27 | Flat Washer, 3/8", Zinc | 2 |
| | 46-0001 | License Plate Bolt Light Kit (Optional, Available Separately) | |

08-50-44438 REV. B

46-3006-03

SUPERSPORT FENDER KIT


KAWASAKI NINJA 250R
2008

TOOLS REQUIRED

| Ref. | Description | Ref. | Description |
|------|--------------------|------|---------------------------|
| 1) | 3/8" Drive Ratchet | 5) | 12mm Socket |
| 2) | 6" Extension | 6) | 10mm Wrench |
| 3) | 4mm Allen Socket | 7) | Soldering Iron (optional) |
| 4) | 10mm Socket | 8) | Wire Cutters (optional) |

INSTALLATION INSTRUCTIONS

- 1) Using the key, unlock and remove the rear cowl.
- 2) Remove the screw securing the right side cover to the motorcycle. Carefully pull the cover away from the motorcycle and set aside. Repeat on the opposite side. (Fig. 1)
- 3) Remove the two bolts securing the rider seat to the motorcycle. Remove the seat.
- 4) Remove the 6 bolts securing the rear plastic to the sub frame. Carefully unsnap and remove the plastic.
- 5) Unplug the rear turn signal wires, tail light wire, and license plate light wire.
- 6) Remove the two bolts securing the tail light assembly to the motorcycle. Remove the tail light.
- 7) Remove the four bolts securing the rear fender assembly to the motorcycle. Remove the complete assembly.
- 8) Make note of the right and left turn signal wire colors. Remove the screw securing each turn signal to the fender assembly. Remove the turn signals.

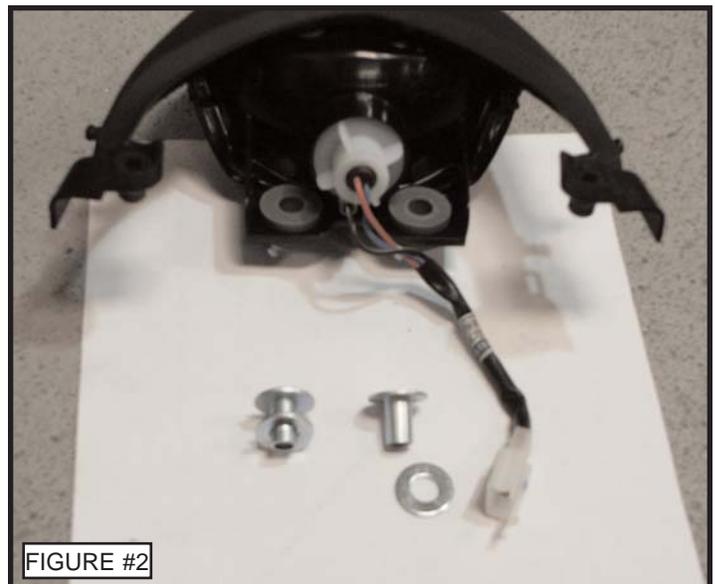

46-3006-03

SUPERSPORT FENDER KIT

**KAWASAKI NINJA 250R
2008**

- 9) On the tail light assembly... Remove the two steel sleeve spacers from the rubber grommets. Place one supplied washer on each spacer and reinstall the spacers into the rubber grommets. (Fig. 2)
- 10) Install the supersport fender bracket to the sub frame using the four original bolts from the stock rear fender. (Fig. 3)
- 11) Mount the tail light to the supersport fender bracket using the two original bolts, and the original nuts from the stock rear fender. Reconnect the tail light plug.
- 12) Mount the turn signals to the supersport fender bracket. Reconnect the turn signal plugs.
- 13) Reinstall the rear plastic to the motorcycle.
- 14) Reinstall the rider seat.
- 15) Reinstall the side covers.
- 16) Reinstall the rear cowl.
- 20) Turn on the motorcycle and check to make sure the turn signals and tail light are operating properly.



FIGURE #3

LICENSE PLATE BOLT LIGHT INSTALLATION (optional, available separately)

- 1) Use the license plate bolt lights to mount your license plate to the Supersport Fender Bracket.
- 2) Locate the now unused license plate light wires inside the tail section.
- 3) Cut and strip the two wires used to power the stock license plate light.
- 4) Attach both the red wires from the license plate light bolts to one of the stripped license plate light wires. Solder the connection and cover.
- 5) Attach both the black wires from the license plate light bolts to the second of the stripped license plate light wires. Solder the connection and cover.
- 6) Turn on the motorcycle and ensure that all lights are working properly prior to riding.

Jardine

PERFORMANCE PRODUCTS

Terms & Conditions

Returns: All requests for product returns must be made within 30 days from date of purchase. The return has to have a Return Material Authorization (RMA) number from Jardine and must include a copy of the original purchase invoice. Customer pays for the return freight and Jardine will exchange product or process a credit to your account. All returns must be in the original packaging to be eligible for any credit or exchange. Any return sent C.O.D. will not be accepted. Special order sales are final and may not be returned.

All warranty claims must be made through your point of purchase.

Limited Warranty: Jardine's warranty extends to the original purchaser only and a copy of the sales receipt must be provided. Keep your receipts. Jardine products are warranted against defective materials and workmanship for a period of 1 year from date of original customer purchase and to the original customer only. Proof of purchase is required. Any non-defective, unopened, unused, not installed item may be returned within seven working days of receipt and will be subject to a 15% restocking / repackaging fee. Bluing and / or discoloration of chrome exhaust systems / products are not covered. Contact the Jardine Customer Service Department directly at 216-265-8400 to obtain a Return Material Authorization (RMA) number prior to return of product. Authorized product will be repaired or returned at Jardine's discretion. Jardine is not responsible for any other expenses, including labor for removal of defective parts incurred by the customer under the terms of this warranty. Nor shall Jardine be responsible for any damages whether consequential, special, contingent or otherwise, or expenses or injury arising from the use of Jardine products. A detailed copy of Sale Terms, Conditions and Warranty information is available at request.

Jardine and Jardine Performance Products are registered trademarks of SuperTrapp Industries, Inc. and may not be used without consent from SuperTrapp Industries, Inc. SuperTrapp Industries, Inc. retains all marketing rights to its products and trademarks.

Jardine Performance Products is manufactured by SuperTrapp Industries, Inc. in Cleveland, OH. Our exhausts, highway bars, backrests, fender kits & accessories for V-Twin, Metric, Sport & Dirt applications are made in the U.S.A. Jardine has been manufacturing performance products since 1959.

E: Jardine@SuperTrapp.com

www.JardineProducts.com

TECH: (216) 265-8400

REV: A 9-12-13