

## USE AND WARRANTY DISCLAIMER

SuperTrapp Industries, Inc. of 4540 W. 160th Street, Cleveland, Ohio 44135 (SuperTrapp), warrants its SuperTrapp products against defects in factory materials and workmanship for one year from the date of purchase or until ownership in the product is transferred, whichever occurs first, subject to limitations below.

Under this warranty, SuperTrapp will repair or replace defective, covered parts, at option, or provide a replacement unit. SuperTrapp makes no warranty with respect to components of the SuperTrapp product not manufactured by SuperTrapp, including, but not limited to the following: clamps, nuts, bolts, packing, boots and hoses. Repair by SuperTrapp or replacement are the exclusive remedies under this written warranty or any implied warranty. SuperTrapp will not pay for the cost of removal or re-installation of the unit from any vehicle or for delivery and pick up of the unit. To obtain service under this warranty, the original purchaser must give specific written notice to his or her dealer within fifteen (15) days after discovery of any claimed defect in the unit, and must return such unit to the dealer within a reasonable time thereafter at the cost of the original purchaser.

This limited warranty is the only express warranty applicable to SuperTrapp product. Any implied warranty of merchantability or fitness for a particular purpose is limited in duration to the duration of this written warranty. Some states do not allow limitations on how long an implied warranty lasts, so the above limitation may not apply to you.

SuperTrapp shall not be responsible for any consequential, special or incidental damages of any nature including but not limited to the loss of use of any vehicle on which the unit may be installed and the cost of obtaining another substitute product. Some states do not allow the exclusion or limitation of incidental or consequential damages so this limitation or exclusion may not apply to you.

This warranty is valid only if proper size of the unit is installed, operated and maintained in accordance with factory instructions. This warranty does not cover any damage caused by (i) modification or alteration of the unit; (ii) improper installation, maintenance, operation or use; (iii) accident; (iv) servicing or repair by anyone other than SuperTrapp or its authorized agents.

**CAUTION!** Warranty does not cover chrome discoloration. You can minimize this problem by thoroughly cleaning and polishing the system before initial start-up, being sure the fuel mixture is not too lean, and preventing long periods of engine



## Installation Instructions



*Since 1975, SuperTrapp has built a reputation on innovation and technical superiority. SuperTrapp® R&D is constantly designing, testing and improving; providing you with the latest in state of the art performance engineering. SuperTrapp® products are absolutely the best performance items available. They will provide years of trouble-free service.*

SuperTrapp® Industries, Inc.

4540 W. 160th St. Cleveland, OH 44135

Phone: (216) 265-8400 fax: (216)265-0130

E-mail: sales@SuperTrapp.com www.SuperTrapp.com



003-7694 02.29.16

## SuperTrapp Fatshots 2:1

**828-74690** Chrome 2:1 For 2006-2011 Harley-Davidson® FXD

**828-74692** Chrome 2:1 For 2012-UP Harley-Davidson® FXD

## STOCK SYSTEM REMOVAL:


1. Remove the stock exhaust system per H-D service manual. Retain the flange nuts for the new system installation. Retain carriage bolt, lock nut, and 2 piece P-clamp for new system installation.
2. Remove the stock snap rings and flanges from the head pipes and retain for the new system installation.
3. Remove the oxygen sensors from the front and rear head pipes and retain for new system installation.
4. Remove the stock exhaust mounting bracket.
5. The exhaust gaskets should be replaced to achieve a proper fitment and seal. Replacement gaskets are available from your Harley-

## SYSTEM INSTALLATION:

1. Remove the two rear transmission housing fasteners. (See **Figure 1**.)
2. Install the new muffler support bracket using the hex head screws, flat washers, lock washers and spacers supplied. *You MUST use the supplied screws, failure to do so will result in damage to the transmission.*
3. Install stock flanges on both head pipes.
4. Apply anti-seize to the threads of the oxygen sensors and install in new head pipes. **NOTE: VERY IMPORTANT:** Apply anti-seize to the threads of the oxygen sensor **ONLY**. Contamination of the sensor probe can adversely affect engine performance.
5. Mount the head pipe using the stock nuts. **DO NOT TIGHTEN.**
6. Align the P-clamp with the stock support bracket located under the cam cover and install the stock bolt and lock nut. (See **Figure 2**) **DO NOT TIGHTEN.** **NOTE:** *The P-clamp half with the round hole mounts up against the bottom of the stock bracket as shown in **Figure 2**.*
7. Slide two T-bolts (supplied) into the slotted bracket on the back of the muffler and slide the T-bolt clamp (supplied) onto the inlet end of the muffler.
8. Slide the muffler onto the outlet end of the head pipe. Align the T-bolts with the holes in the mounting bracket. Install the flat washers and locknuts onto the T-bolts. **DO NOT TIGHTEN.**
9. Align the system and tighten all fasteners and clamps starting at the flange nuts and working back to the muffler. Tighten the P-clamp bolt last. Torque the 5/16" transmission screws to 13-16 ft. lbs.
10. Reconnect oxygen sensors to stock harness.

## HEAT SHIELD INSTALLATION:

1. Slide the hose clamps into the slots on the back of each shield. Orient the clamps to gain the easiest access to tighten them while in position on the head pipe.
2. Install the heat shields on the head pipes and collector. The tabs on the front of the collector shield must fit into the clips on the end of the front and rear shields.
3. Tighten the shields starting with the rear shield, then the collector shield, and finally the front shield. Align the shields as you tighten to

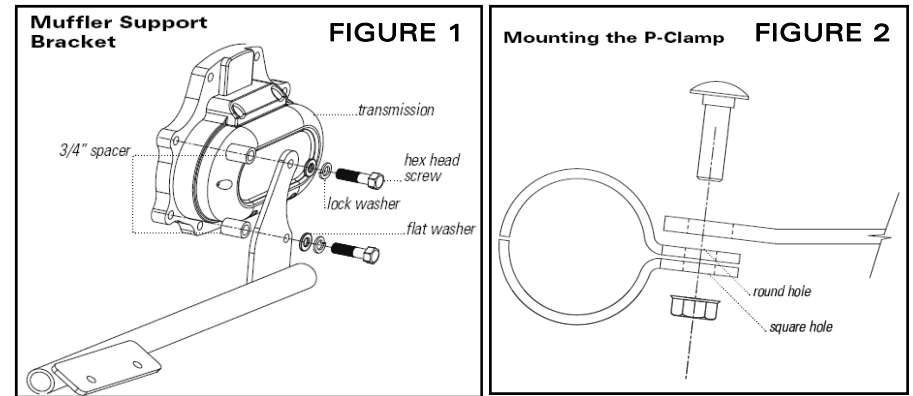

**IMPORTANT: AFTER A SHORT RIDE CHECK AND RETIGHTEN ALL FASTENERS.**

## Tuning Tips

For maximum performance gains, we suggest using 18 discs and a free-flowing air filter kit with this exhaust system. As always, making performance modifications may affect the fuel delivery system of your motorcycle. It is recommended by Supertrapp to have your fuel delivery system tuned to ensure maximum performance and reliability. This work should always be performed by a certified technician.

We **DO NOT** suggest removing the muffler packing material to "get more noise". Removing the packing will result in a loss of power, discoloration of the finish on the muffler, and potential failure of the mechanical portion of the core.

## END CAP & DISC INSTALLATION:

1. Stand the muffler on the bench with the outlet end pointing up.
2. Place the appropriate amount of discs and end cap on the outlet of the muffler. The flat surface of the discs should be against the core with the outer lip angled away from the muffler. Align the (6) screw holes with the threaded inserts in the muffler outlet. (SEE DIAGRAM)
3. Insert the screws through the end cap and discs and into the threaded inserts in the muffler outlet. (SEE DIAGRAM)
4. Tighten the screws evenly in a cross pattern, SEE DIAGRAM. 4" discs should be tightened to 15-25 in/lbs and 5" discs to 40-50 in/lbs or once the screw head contacts the end cap tighten 2 full turns.

