

ACCESSORIES

250-7464	Chrome Stock End Caps (2 end caps are included with all Mean Mother Drag Pipes)
250-7465	Optional Chrome Turndown End Cap. 90° rotatable. Sold individually.
250-7466	Optional Chrome Slash Cut End Cap. 90° rotatable. Sold individually.
408-72472	Replacement Heat Shield Kit for Staggered Mean Mothers (Part No. 138-72472)
408-72470	Replacement Heat Shield Kit for Regular Mean Mothers (Part No. 138-72470)

CUSTOMER SERVICE

Call Dealership or Point of Purchase in which the exhaust was purchased for questions on returns, repairs, or fit and finish of SuperTrapp® products.

Call SuperTrapp® Customer Service for technical questions between 8am-5pm Eastern Time, (216) 265-8400, or by fax, (216) 265-0130.



Since 1975, SuperTrapp has built a reputation on innovation and technical superiority. SuperTrapp R&D is constantly designing, testing and improving; providing you with the latest in state of the art performance engineering. SuperTrapp Mean Mother™ Drag Pipes are absolutely the best bolt-on performance items available. They will provide years of trouble-free service.

SuperTrapp® Industries, Inc.
4540 W. 160th St. Cleveland, Ohio 44135 (216) 265-8400 fax. (216) 265-0130
e-mail. sales@supertrapp.com | www.supertrapp.com



003-7270 02.24.04

MEAN MOTHER DRAG PIPES™ INSTRUCTIONS

- 138-72470 Regular Chrome Plated Drag Pipes for Harley-Davidson® FXD Dyna-Glide Models
- 138-72472 Staggered Chrome Plated Drag Pipes for Harley-Davidson® FXD Dyna-Glide Models

PRE-INSTALLATION NOTES

You must use the cone shaped cylinder to headpipe gaskets available from your Harley-Davidson dealer with this kit. Do not use the flat type gaskets with our headpipe.


STOCK SYSTEM REMOVAL

- 1 Remove the stock exhaust system as described in your owner's manual. (Retain the flange nuts and carriage bolt from the front support clamp for the new system installation).
- 2 Remove the stock flanges from the head pipes and retain for the new system installation.
- 3 Remove the stock exhaust mounting bracket.
- 4 Remove the stock exhaust gaskets and replace them with new conical type exhaust gaskets.

SUPERTRAPP® INSTALLATION

- 1 Install the new mounting bracket to the stock location using the spacers, washers, lock washers and bolts supplied (SEE FIGURE #1). Tighten to manufacturers specification, see service manual.
- 2 Install the stock flanges on both head pipes.
- 3 Install the new front head pipe using the stock flange nuts. (DO NOT TIGHTEN)
- 4 Align the pipe with the mounting bracket and install (2) of the supplied 5/16 flange head bolts. (DO NOT TIGHTEN)
- 5 Align the C-clamp on the stock mount below the timing cover and install the stock carriage bolt. (DO NOT TIGHTEN)
- 6 Install the new rear head pipe using the stock flange nuts. (DO NOT TIGHTEN)
- 7 Align the pipe with the mounting bracket and install (2) of the supplied 5/16 flange head bolts. (DO NOT TIGHTEN)
- 8 Align both pipes so they are parallel to each other and tighten all fasteners starting at the exhaust port and working back to the mounting bracket.

IMPORTANT: After a short ride, check and re-tighten all fasteners.

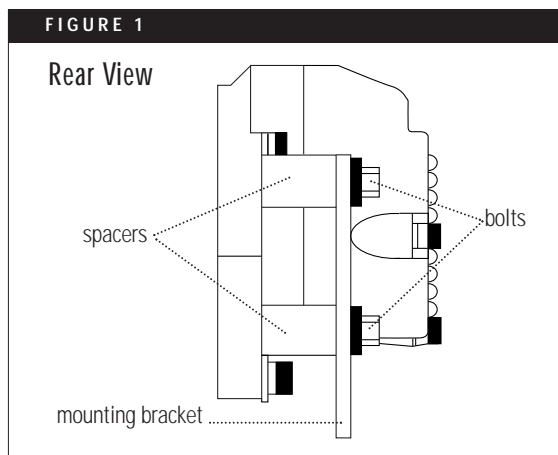

LIMITED WARRANTY

SuperTrapp Industries, Inc. of 4540 West 160th Street, Cleveland, Ohio 44135 ("SuperTrapp"), warrants its SuperTrapp muffler against defects in factory materials and workmanship for one year from the date of purchase or until ownership in the muffler is transferred, whichever occurs first, subject to limitations below.

Under this warranty, SuperTrapp will repair or replace defective, covered parts, or, provide a replacement unit. SuperTrapp makes no warranty with respect to components of the SuperTrapp muffler not manufactured by SuperTrapp, including but not limited to the following: clamps, nuts, bolts, packing, boots, and hoses. Repair by SuperTrapp or replacement are the exclusive remedies under this written warranty or any implied warranty. SuperTrapp will not pay for the cost of removal or re-installation of the unit from any vehicle or for delivery and pick up of the unit. To obtain service under this warranty, the original purchaser must give specific written notice to his or her dealer within fifteen (15) days after discovery of any claimed defect in the unit, and must return such unit to the dealer within a reasonable time thereafter at the cost of the original purchaser.

This limited warranty is the only express warranty applicable to the SuperTrapp muffler. Any implied warranty of merchantability or fitness for a particular purpose is limited in duration to the duration of this written warranty. Some states do not allow limitations on how long an implied warranty lasts, so the above limitation may not apply to you.

SuperTrapp shall not be responsible for any consequential, special or incidental damages of any nature including but not limited to the loss of use of any vehicle on which the unit may be installed and the cost of obtaining another substitute muffler. Some states do not allow the exclusion or limitation of incidental or consequential damages so this limitation or exclusion may not apply to you.

This warranty is valid only if the proper size of the unit is installed, operated and maintained in accordance with factory instructions. This warranty does not cover any damage caused by (i) modification or alteration of the unit; (ii) improper installation, maintenance, operation, or use; (iii) accident; (iv) servicing or repair by anyone other than SuperTrapp or its authorized agents.

This warranty does not cover chrome discoloration.

This warranty gives you specific legal rights and you may also have other rights which vary from state to state. Outside the United States, a different warranty may apply. For details, please contact your authorized SuperTrapp distributor.