


SUPERSPORT FENDER KIT

HONDA CBR600RR 2007-08

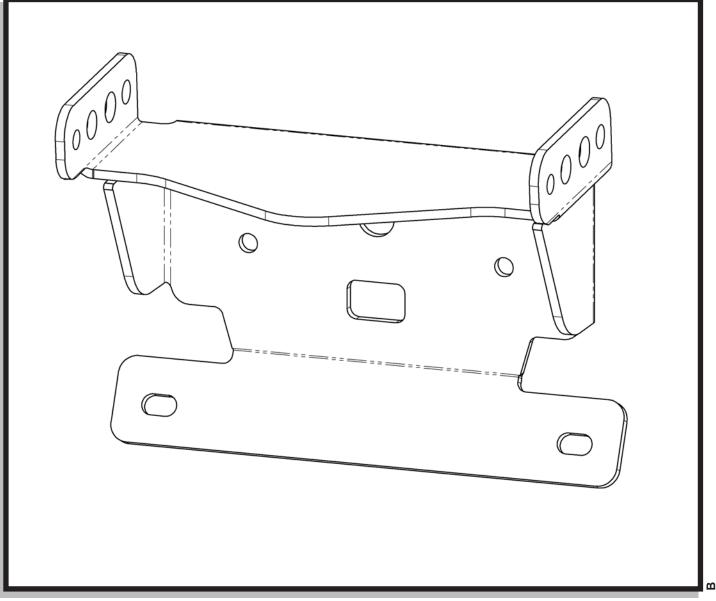

# PARTS INCLUDED

| Ref. | Part Number   | Description  | Qty |
|------|---------------|--|-----|
| 1)   | 04-24-43039   | Supersport Fender Bracket                                      | 1   |
| 2)   | 01-7405080-20 | Nut, Hex Flange, M5-0.8  | 2   |
|      | 46-0001       | License Plate Bolt Light Kit (Optional, Availabale Separately) |     |

### 46-1005-03

SUPERSPORT FENDER KIT

#### HONDA CBR600RR 2007-08

## TOOLS REQUIRED

- Ref. Description
- 1) 3/8" Drive Ratchet
- 2) 6" Extension
- 3) 4mm Allen Socket
- 4) 10mm Socket

## INSTALLATION INSTRUCTIONS


- 1) Make sure the motorcycle is cool and place securely on a service lift or stand.
- Remove the two bolts securing the rider seat to the motorcycle. Remove the seat. See Figure #1
- 3) Using the key, remove the passenger seat.
- Remove the bolts and push pin fasteners securing the tail section to the sub frame. Carefully spread the tail section and remove it from the motorcycle. See Figure #2
- 5) Disconnect the turn signal & tail light plugs on the left side of the sub frame.
- 6) Remove the four bolts securing the complete rear fender assembly (including the tail light & turn signals) and the rear reflectors to the sub frame. Remove from the motorcycle. See Figure #3
- Remove the two nuts from the back side of the reflectors and retain to be used elsewhere in Step #16.
- 8) Remove the two grey "wings" from the fender arms. See Figure #4

| Ref. | Description |
|------|-------------|
| 5)   | 12mm Socket |

- 6) 10mm Wrench
- 7) Soldering Iron (optional)
- 8) Wire Cutters (optional)





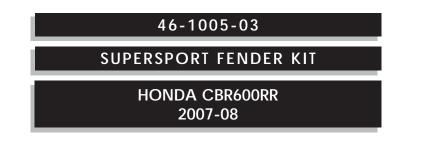



**9)** Remove the nuts and bolts securing the tail light mounting bracket to the rear fender assembly. Slide the tail light out of the rear fender.

10) Remove the nuts securing the tail light to the tail light mounting bracket. See Figure #5

- 11) Remove the nuts securing the left & right turn signals to the rear fender. Remove the turn signals. *NOTE: Right = Blue, Left = Orange*
- **12)**Remove the metal brackets from the turn signal mounting grommets on the rear fender. Remove the rubber grommets.
- **13)**The center (tail light) section of the rear fender will now separate from the arms. It will not be reused.
- 14)Reinsert the turn signal grommets into the rear fender arms. Insert the metal brackets into the grommets.
- 15) Using the original flange nuts, mount the turn signals to the rear fender arms and the new tail light adapter bracket. Fully tighten the nuts. See Figure #6



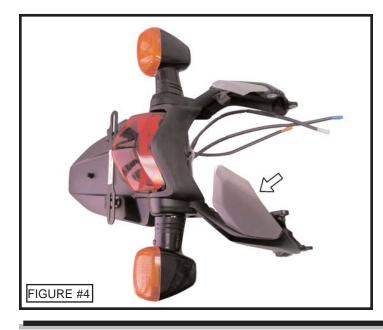

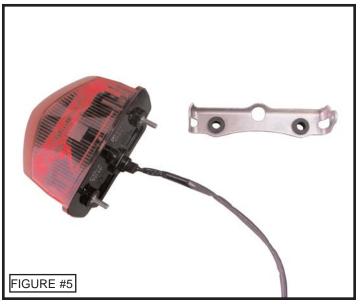

#### 46-1005-03

#### SUPERSPORT FENDER KIT

#### HONDA CBR600RR 2007-08

- 16) Using the original button head bolts, washers, and the nuts removed from the reflectors in Step #7, secure the rear fender arms to the tail light adapter bracket. See Figure #6
- **17)**Using the supplied M8-1.25 **black zinc** hex flange nuts, secure the tail light to the tail light adapter bracket. The tail light adapter bracket assembly is complete.
- **18)**Using the four original mounting bolts, loosely mount the rear fender assembly to the sub frame on the motorcycle.

**19)**Feed the tail light and turn signal wires to the connectors and reconnect all wires. Fully tighten the rear fender mounting bolts.



- **20)**Turn on the motorcycle and check to make sure the turn signals and tail light are operating properly. Adjust the brake light switch if needed.
- 21) Using the original hardware, mount the tail section to the sub frame.
- **22)**Using the original hardware, reinstall the rider seat.
- 23) Reattach the passenger seat.

### LICENSE PLATE BOLT LIGHT INSTALLATION (optional, available separately)

- 1) Use the license plate bolt lights to mount your license plate to the Supersport Fender Bracket.
- 2) Locate the now unused license plate light wires inside the tail section.
- 3) Cut and strip the two wires used to power the stock license plate light.
- 4) Attach both the red wires from the license plate light bolts to one of the stripped license plate light wires. Solder the connection and cover.
- 5) Attach both the black wires from the license plate light bolts to the second of the stripped license plate light wires. Solder the connection and cover.
- 6) Turn on the motorcycle and ensure that all lights are working properly prior to riding.



# **Terms & Conditions**

**<u>Returns:</u>** All requests for product returns must be made within 30 days from date of purchase. The return has to have a Return Material Authorization (RMA) number from Jardine and must include a copy of the original purchase invoice. Customer pays for the return freight and Jardine will exchange product or process a credit to your account. All returns must be in the original packaging to be eligible for any credit or exchange. Any return sent C.O.D. will not be accepted. Special order sales are final and may not be returned.

#### All warranty claims must be made through your point of purchase.

Limited Warranty: Jardine's warranty extends to the original purchaser only and a copy of the sales receipt must be provided. Keep your receipts. Jardine products are warranted against defective materials and workmanship for a period of 1 year from date of original customer purchase and to the original customer only. Proof or purchase is required. Any non-defective, unopened, unused, not installed item may be returned within seven working days of receipt and will be subject to a 15% restocking / repackaging fee. Bluing and / or discoloration of chrome exhaust systems / products are not covered. Contact the Jardine Customer Service Department directly at 216-265-8400 to obtain a Return Material Authorization (RMA) number prior to return of product. Authorized product will be repaired or returned at Jardine's discretion. Jardine is not responsible for any other expenses, including labor for removal of defective parts incurred by the customer under the terms of this warranty. Nor shall Jardine be responsible for any damages whether consequential, special, contingent or otherwise, or expenses or injury arising from the use of Jardine products. A detailed copy of Sale Terms, Conditions and Warranty information is available at request.

Jardine and Jardine Performance Products are registered trademarks of SuperTrapp Industries, Inc. and may not be used without consent from SuperTrapp Industries, Inc. SuperTrapp Industries, Inc. retains all marketing rights to its products and trademarks.

Jardine Performance Products is manufactured by SuperTrapp Industries, Inc. in Cleveland, OH. Our exhausts, highway bars, backrests, fender kits & accessories for V-Twin, Metric, Sport & Dirt applications are made in the U.S.A. Jardine has been manufacturing performance products since 1959.

E: Jardine@SuperTrapp.com

www.JardineProducts.com

TECH: (216) 265-8400