

## Limited Warranty

SuperTrapp Industries, Inc. of 4540 West 160th Street, Cleveland, Ohio 44135 (SuperTrapp), warrants its SuperTrapp products against defects in factory materials and workmanship for one year from the date of purchase or until ownership in the product is transferred, whichever occurs first, subject to limitations below.

Under this warranty, SuperTrapp will repair or replace defective, covered parts, at option, or provide a replacement unit. SuperTrapp makes no warranty with respect to components of the SuperTrapp product not manufactured by SuperTrapp, including but not limited to the following: clamps, nuts, bolts, packing, boots, and hoses. Repair by SuperTrapp or replacement are the exclusive remedies under this written warranty or any implied warranty. SuperTrapp will not pay for the cost of removal or re-installation of the unit from any vehicle or for delivery and pick up of the unit. To obtain service under this warranty, the original purchaser must give specific written notice to his or her dealer within fifteen (15) days after discovery of any claimed defect in the unit, and must return such unit to the dealer within a reasonable time thereafter at the cost of the original purchaser.

This limited warranty is the only express warranty applicable to SuperTrapp product. Any implied warranty of merchantability or fitness for a particular purpose is limited in duration to the duration of this written warranty. Some states do not allow limitations on how long an implied warranty lasts, so the above limitation may not apply to you.

SuperTrapp shall not be responsible for any consequential, special or incidental damages of any nature including but not limited to the loss of use of any vehicle on which the unit may be installed and the cost of obtaining another substitute product. Some states do not allow the exclusion or limitation of incidental or consequential damages so this limitation or exclusion may not apply to you.

This warranty is valid only if the proper size of the unit is installed, operated and maintained in accordance with factory instructions. This warranty does not cover any damage caused by (i) modification or alteration of the unit; (ii) improper installation, maintenance, operation, or use; (iii) accident; (iv) servicing or repair by anyone other than SuperTrapp or its authorized agents.

**CAUTION!** Warranty does not cover chrome discoloration. You can minimize this problem by thoroughly cleaning and polishing the system before initial start-up, being sure the carburetion jetting is not too lean, and preventing long periods of engine idle.

This warranty gives you specific legal rights and you may also have other rights which vary from state to state. Outside the United States, a different warranty may apply. For details, please contact your authorized SuperTrapp distributor.



*Since 1975, SuperTrapp has built a reputation on innovation and technical superiority. SuperTrapp R&D is constantly designing, testing and improving; providing you with the latest in state-of-the-art performance engineering. SuperTrapp 2:1 SuperMegs are the culmination of hundreds of hours of street, track and dyno-development. They will provide you with unmatched performance and lasting, trouble-free service.*

SuperTrapp Industries, Inc.  
4540 W. 160th St. Cleveland, Ohio 44135  
Phone: (216) 265-8400 Fax: (216) 265-0130  
Email: sales@supertrapp.com www.supertrapp.com



003-9399 07.06.06

# SuperTrapp IDSX Series

Slip On Exhaust / Installation Instructions  
**835-9400** / Arctic Cat 400



## CAUTION! Please Read Before Proceeding

Failing to properly tune your quad after installation will void any warranty on this product.

Tuning the fuel delivery system is essential not only to improve performance, but also to ensure durability of your quad. Typically, an exhaust system that is less restrictive than stock will require richer fuel mixture. Whether your ATV is equipped with a carburetor or fuel injection system, tuning changes can be made to get the most out of your SuperTrapp performance exhaust. Your OEM dealer may have jet kits or maps that will work adequately for your application. Otherwise, a qualified technician can properly tune the fuel system for your specific application. Call your local dealer for recommendations on tuning changes for your quad.

## General Tuning Guide

The following will give you a base to work with in understanding how your SuperTrapp functions in relationship to the following parameters: POWER, SOUND, and FUEL SYSTEM TUNING.

Your system was supplied with 12 diffuser discs. On most models, using 9 discs will work fine with stock fuel mixture settings and air filter. We consider 6 discs the minimum to use; this will flow about the same amount of air as your stock system would in most cases. In many cases, using 10 or more discs will necessitate a fuel system change.

Example: Let's say you start off with 9 discs and your quad runs fine, but you want more power. By adding discs you do three things: (1) the exhaust tone will get louder, (2) the motor will run leaner (carburetion), and (3) your horsepower and power band will go up. It's the opposite if you take discs out; (1) the exhaust tone will get quieter, (2) the motor will run richer (carburetion), and (3) the horsepower and power band will move down. The secret to performance tuning is knowing how to make parts work together. It is very difficult, even with sophisticated equipment, to determine absolute fuel changes. Temperature, humidity, elevation, engine modifications, etc., all play a role in determining correct fuel tuning. As a rule, any increase in intake and/or exhaust flow will require an increase in fuel.

## Closed End Cap Installation

(See Figure 1). Holding the body with the mounting brackets pointing up, install the end cap. The outlet should be pointing down. Align the threaded holes in the cap with the holes in the body. Install the 1/4 -20 button head screws and star lock washers supplied.

## Stock System Removal

- 1 Remove muffler from the expansion joint back. Retain stock gasket.

## IDSX Installation

- 1 Install the new mounting bracket in stock mount points using supplied hardware. DO NOT TIGHTEN
- 2 Align the muffler with the headpipe and mount bracket and loosely install supplied bolt, washers, and nylock nut. DO NOT TIGHTEN.
- 3 Using stock exhaust gasket, align the muffler and head pipe and install the supplied exhaust mount springs.
- 4 Tighten mount bracket fastener and body mount fasteners.

**Important:** After a short test ride, allow the mufflers to cool down, check and retighten all fasteners.

## Cleaning and Maintenance

The IDSX system is manufactured from stainless steel. Stainless steel is used for its high strength at high temperatures and resistance to corrosion. Before you run your new SuperTrapp IDSX for the first time, clean all grease, fingerprints, and dirt from the entire system. (A good glass cleaner works well.) A clean, grease-free surface will allow even coloration. After a relatively short time of running, the IDSX will begin to take on a gold tint. The coloration will be relatively even throughout the entire system. The hotter you get the system, the darker it will become. Due to the unique properties of stainless steel, the care of the IDSX is minimal. Although, do not hesitate to use soapy water and a soft cloth to clean the surfaces. Scratches and abrasions can be removed by lightly sanding around the circumference of the parts (not the length) with 600 grit wet/dry sandpaper. A fine Scotch-Brite pad can then be used to remove any heavier sanding marks and restore the original hand buffed finish.

## Accessories & Replacement Parts

When ordering accessories or replacement parts you may need the part number of this silencer. Please record the part number and date of manufacture here.

Part No. _____	Date of Manufacture _____
High Temp Lube	090-2622
Disc Pack (6 Discs)	304-6506
Repack Kit with Badge	301-0835

## Customer Service

Call Dealership or Point of Purchase in which the exhaust was purchased for questions on returns, repairs, or fit and finish of SuperTrapp products.

Call SuperTrapp Customer Service for technical questions between 8am-5pm Eastern Time, (216) 265-8400, or by fax, (216) 265-0130.


Figure 1

### Disc & End Cap Installation

install discs in this direction, with angle of outer lip of the discs pointing towards the end cap, and away from the muffler.

closed end cap

disc stack

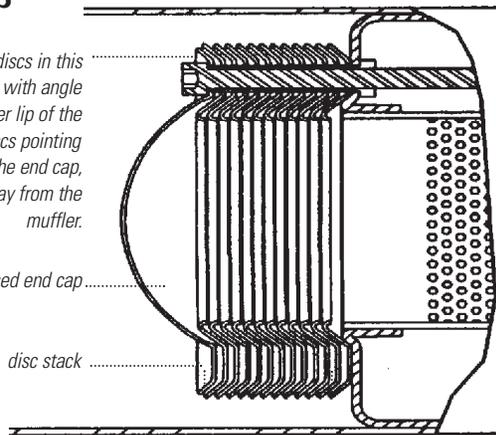

## Disc Installation

(See Figure 1). For this application install **6 discs** with stock jetting and air filter. Additional discs, airbox modifications, and/or a free flowing air filter will require richer fuel mixture. Coat the (3) mounting screws with high temperature lube. Install the (3) screws through the closed end cap and disc stack. While holding the muffler body horizontal, insert the entire assembly into the body using the supplied T-handle hex key inserted into one of the screw heads as a handle. Rotate the muffler vertically so the discs drop against the core. Tighten the screws in a cross pattern to approximately 15 in/lbs. of torque. It is essential that they are torqued evenly.